
NOT TO SCALE

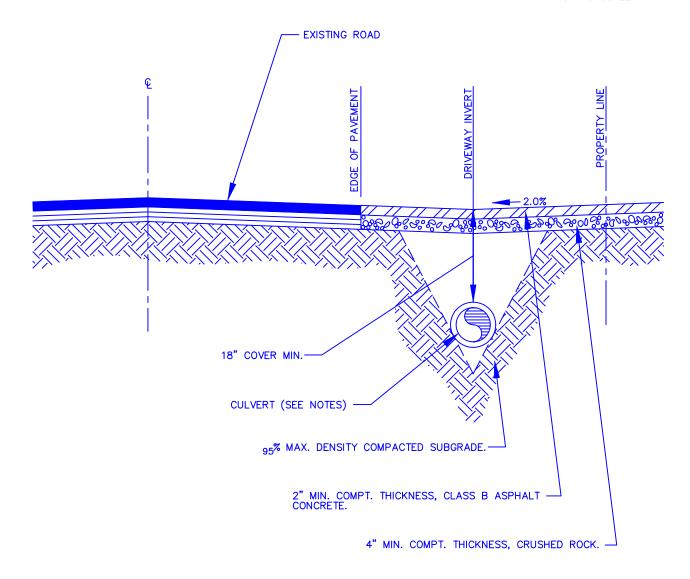

## CONSTRUCTION NOTES:

INSTALLATION — MINIMUM 21 LINEAR FEET OF 12" CONCRETE OR C.M.P. CULVERT PIPE. A LARGER DIAMETER PIPE MAY BE REQUIRED IF DRAINAGE WARRANTS. OTHER DOWNSTREAM DITCHING WORK MAY BE REQUIRED TO MAINTAIN POSITIVE FLOW.

FOR WORK TO BE DONE WITHIN CITY OF REDMOND RIGHT-OF-WAY, A STREET USE PERMIT WILL NEED TO BE OBTAINED PRIOR TO CONSTRUCTION.

## **DRIVEWAY CROSS SECTION**

NO SCALE

APPROVED: RICHARD H. BARTHOL
REV. DATE: JULY 1, 2000

**ENGINEERING DIVISION** 



STANDARD DETAILS

**DRIVEWAY CROSS SECTION** 

FILE SD309.DWG DRAWING NO. 309